FloorCare



I FloorCare

The development of floors and flooring materials within the broad range of commercial developments has been very pronounced over the past decade.



Contents

TwinTec Vario 22-25 Hurricane Ride-on 26-31 Nuspeed Brushes and Pads 32-33 TwinTec Mains / Cable 10-14 34-35 Accessories TwinTec Battery



Hunicane The 1000W Size

The single disc floor machine is the heart of all hard floor cleaning and maintenance.

The Hurricane motor concept is designed to keep its "Cool" under continuous and arduous operation whilst its seamless power transmission to the floor is via our long-life, oil filled, low load planetary gearbox. THE HFM1015 150rpm machine is equipped with the 1000W Hurricane motor providing a lighter weight and economical solution.


- Planetary Gearbox Long life, oil filled, low load planetary gearbox.
- Hi-Cool Motor Heavy duty, long life motor.
- ATC (Automatic Torque Control)

 Monitoring and balancing power input throughout the cleaning cycle.
- Fully Adjustable Handle For the perfect working position.





All Hurricane models incorporate our ATC, **Automatic Torque Control, monitoring** and balancing operational power input throughout the cleaning cycle.





Optional Hi-Dust Motor Filter



Model	Motor	Deck	Brush	Pad	Power	Speed	Range	Weight	Dimensions (WxLxH)
HFM 1015	1000W	450mm	450mm	400mm	230V AC 50Hz	150rpm	32m	26kg	460x560x1250mm

HFM1015

Hunicane The 1500W Size

The HFM 1500 series is available in a choice of 4 different speeds, 150rpm, 230rpm, 300rpm and extra Hi-speed 450rpm.

All models are fitted as standard with our generous oversize Hurricane 1500W drive motor allowing for higher speeds and the use of added weight as required.

The long life, low load, oil filled planetary gearbox ensures seamless power transmission to the floor ensuring excellent results.

With the range of speeds available machines can be selected to cover the whole range of floor care maintenance be it scrubbing, polishing, buffing, burnishing or spray cleaning.

- Planetary Gearbox Long life, oil filled, low load planetary gearbox.
- NuLoc 2 Systems Optional pad interchange systems, quick, simple and secure.
- Hi-Cool Motor 1500W motor allowing for higher speeds and the use of added weight as required. Available in a choice of 4 speeds 150rpm, 230rpm, 300rpm, 450rpm.
- ATC (Automatic Torque Control) Monitoring and balancing power input throughout the cleaning cycle.
- Fully Adjustable Handle Adjustable for the perfect position.

 Accessories A range of accessories available to cover wet applications, carpet shampooing, vacuum polishing and floor

sanding.



HFM1515 150rpm HFM1523 HFM1530 300rpm HFM1545



Optional 10Kg additional weight

Hunicane The Two Speed

There are more and more applications where the floor machine must fulfil two functions literally at the "Flick of a Switch".

The HFT model is fitted with the Hurricane dual performance motor rated at 1000W/1250W providing optimised power options at the two different operating speeds.


For scrubbing you want 150rpm but for polishing 300rpm giving quicker and better results. This is very much the case in hospitals, care homes, hotels, schools, etc. where the needs vary quite substantially each day and two separate machines are not always practical or available.





Optional 10Kg Additional weight (150rpm)

HFT1530



6 (See page 32 for full accessories) Images may include optional accessories for illustration purposes.



HFT Twin speed selection

- Planetary Gearbox Long life, oil filled, low load planetary gearbox.
- Dual Speed
 Dual speed motor giving speeds of 150rpm for scrubbing and 300rpm for polishing.
- ATC (Automatic Torque Control)
 Monitoring and balancing power input throughout the cleaning cycle.
- Accessories

A range of accessories available to cover wet applications, carpet shampooing, vacuum polishing and floor sanding.



Humicane NuShine The High Speed Burnisher

Great styling, easy control and powerful. Designed to allow for effortless performance at higher burnishing speeds. When size and weight are a factor the HNS offers the ideal balance.

A compact yet powerful machine with supreme manoeuvrability. If you want stunning results combined with effortless performance then this is the machine for you. The NuShine has complete directional control which means a consistently high standard of finish.

 Powerful Hi-Cool 1500W Motor

Heavy duty, long life motor.

- Automatic Torque Control Monitoring power and balance.
- Fully Adjustable Operator Handle

Easy to use and fully adjustable operator handle.

Effortless

Effortless all direction control, superb manoeuvrability.

Brush Pressure Monitor
 Allowing you to be in control of the surface finish achieving optimum results with superior handling.



Simple load adjustment



NuSpeed The Super Compact Size

The LoLine will put truly usable power, convenience and efficiency in the hands of the operator, giving superb results.

The LoLine rotary has been designed specifically to meet the demand and raise the handling and performance levels to an exceptional user friendly standard.

Our LoLine NLL332 can claim performance characteristics equal to that of bigger, more industrial machines, yet with an ease and speed of operation that will immediately endear it to any user.

A full range of 33cm (13") brushes and pad drives allows the machine to be used for all of the primary floorcare functions.



Solution tank option



• Pads and Brushes Full range of 33cm (13") brushes and pad drives for all primary floor

and pad drives for all primary floo care functions.

Easy Storage

Only 18kg in weight, compact size and folding design means easy and convenient to move and store.

• 200rpm

200rpm means versatility but equals performance of bigger more industrial machines.



 Model
 Motor
 Deck
 Brush
 Pad
 Power
 Speed
 Vacuum
 Range
 Weight
 Dimensions (WxLxH)

 NLL332
 400W
 330mm
 330mm
 230V AC 50/60Hz 200rpm
 32m
 18kg
 450x580x1185mm

NuSpeed The Full Size

The NuSpeed range of professional Floorcare machines has been specifically designed to provide optimum results whatever the application.

All NuSpeed NR models within the range are equipped with our performance enhancing ATC (Automatic Torque Control) feature. This is a unique system that monitors operation and boosts torque as required to provide consistent performance under varying load conditions.

ATC

ATC (automatic torque control) monitoring and balancing power input throughout the cleaning cycle.

Xtra Weight

Unique Nuspeed design means an increase in operating weight of 40kg can be achieved within the standard specification.

Easy Storage

Compact size and folding handle means easy and convenient to move and store.



Planetary gearbo



Pad Power Speed Vacuum Range Weight Dimensions (WxLxH)

NR1500S 1500W 400mm 450mm 400mm 230V AC 150rpm Optional 32m 40kg 460x580x1250mn

TWINTEC The Cylinder Machine

Designed to be compact, easy to operate and exceptionally manoeuvrable when in use, whilst the oversized transit wheels allow easy movement to and from any specific locations.

The cylinder power brush ensures deep cleaning performance, whilst the twin water pickup nozzles allow multi-directional operation which is vitally important when cleaning narrow walkways often found in shops and food stores. You can walk in forwards and reverse out without turning and without loss of scrubbing and drying performance.



 Model
 Brush Motor
 Vac Motor
 Power
 Brush Speed
 Range
 Brush Width
 Capacity
 Weight
 Dimensions (WxLxH)

 TT1535S
 400W
 1000W
 220-240V 50Hz
 1000rpm
 42m
 450mm
 15L
 38kg
 480x750x740mm



Overfill cut off system

- Compact
- Yet exceptionally manoeuvrable.
- Multidirectional
 Twin water pickup nozzles for all round cleaning.
- Cylinder Power Brush Ensures deep cleaning.
- Swing Steering
 Provides easy directional control.
- Transit Wheels
 Oversized transit wheels allow easy movement to and from any location.
- Simple Control Easy to use operator controls.



Adjustable water flow



Operator controls

TVINTEC The Compact Single Disc

The TwinTec 1840 cable machine has been designed to address the question of size being exceptionally compact, yet with performance equal to bigger machines.

The compact design really does allow this machine to clean in areas normally cleaned by hand, yet 30% to 40% faster and better.

Although designed for small and congested areas the TT1840 is equally at home in larger areas and can be used in conjunction with our cable roll, "the cable reel that rolls", extending the cable length from 20m to 40m without any loss of performance.

The style and proportion of the polyform water tanks allow for the machine to adopt a convenient tilt position with only approximately 5 litres in the clean water tank to facilitate single handed brush or pad changing.





- Convenient
 Fold flat design for easy transport from site to site.
- Rugged Construction Tough all steel chassis design.
- Fully Adjustable Handle For the perfect working position.
- Low Noise
 Quieter, unobtrusive design means true versatility.
- Easy Change
 Easy one handed brush or pad changing.



Visible operation





Simple controls

WELL BELLEVILLE OF THE STATE OF



Fasy and generous fill

10 (See page 32 for full accessories)

EcoTec Value Engineered

The EcoTec Economy 4045 is designed to provide an exceptional "value for money" professional machine and to clean to a professional standard.

The very big advantage of the cable electric machines is the exceptional power and performance available to clean floors that are both rough and excessively dirty.

Two cost saving specification changes have been made compared with the TT premium model, being a nutex epoxy powder coated chassis in place of stainless steel and a Structofoam floor tool in place of aluminium.



Model	Brush Motor	Vac Motor	Power	Brush Speed	Range	Pad/Brush width	Capacity	Weight	Dimensions WxLxH
ET4045	1500W	1000W	220-240V 50Hz	150rpm	42m	400/450mm	40L	57kg	470x890x1180mm





Non-marking wheels

- Nutex Chassis Nutex epoxy powder coated chassis.
- Planetary Gearbox Numatic high efficiency long life gearbox.
- Structofoam Tilting Brush
- Making brush changes quick and simple.
- Polyform Tanks Heavy duty clean and dirty water tanks.
- Twinflo Vacuum Motor Provides exceptional wet pick up.
- Fully Adjustable Handle For the perfect working position.
- Simple Control System Soft touch Nutronic controls.



TwinTec A Range of Two


The TwinTec mains cable range has masterful performance moving under its own brush power with amazing speed and purpose. Available with 45 or 55cm scrub width.

When selecting a scrubber dryer machine, the area that needs to be cleaned and the time available to clean it will determine the preferred size of the brush system.



Care must be taken, however, to ensure that bigger is better but not too big, taking into account the obstructions that must be navigated during the daily cleaning cycle.

- Twinflo Vacuum Motor Provides exceptional wet pick up.
- Structofoam Tilting Brush Making brush changes quick and simple.
- Planetary Gearbox.
 Long life, oil filled, low load gearbox.
- Simple Control Simple on / off trigger control.
- Polyform Tanks Heavy duty clean and dirty water tanks.
- Stainless Chassis Strong full stainless steel chassis.
- Flexifill System Easy filling and emptying system.



Tilting deck for easy brush change and storage

Model	Brush Motor	Vac Motor	Power	Brush Speed	Range	Pad/Brush Width	Capacity	Weight	Dimensions (WxLxH)
TT4045		400014	220-240V	450	40	400/450mm	401	67kg	470x890x1100mm
TT4055	1500W	1200W	50Hz	150rpm	42m	500/550mm	40L	68kg	560x935x1100mm

Full stainless steel chassis and non marking wheels



Additional fill and filter point



TwinTec Big & Bold


The TT6650 cable machine is a genuine workhorse providing a truly cost effective answer to big area low cost floor maintenance.

First and foremost the user will find the TT6650 as easy to use as our smaller machines with the control and operation systems to exactly the same specification, it handles like

Big capacity polyform tanks provide a full 60 litre capacity to match the exceptionally stable 65cm single brush scrubbing head, complemented by an oversized, floating aluminium floor tool.

- Polyform Tanks Heavy duty clean and dirty water tanks.
- Structofoam Tilting Brush
- Making brush changes quick and simple.
- Fully Adjustable Handle For the perfect working position.
- Twinflo Vacuum Motor Provides exceptional wet pick up.
- Stainless Chassis Strong stainless steel chassis.





Easy tank filling access

TwinTec Battery compact The TwinTec 1840 machine has been designed to address the question of size being exceptionally compact, yet with

performance equal to bigger machines.

The compact design really does allow this machine to clean in areas normally cleaned by hand, yet 30% to 40% faster and better.

 Cable Free Total freedom of 24V battery operation.

- Battery Pack Quick change 24V gel battery pack.
- Water Feed System 360° water feed system for uniform liquid delivery to floor.
- Fully Adjustable Handle Flat to upright for perfect position.
- Parabolic Squeegee 270° rotating parabolic squeegee system.
- Quick Change
 Fast, single handed brush or pad
 changing.
- Hi / Lo Mode For quieter cleaning when needed.






Easy and generous fill cap



very small for easy storage



Quick change gel battery pack



EcoTec Battery Value & Performance

The EcoTec Economy 4045 is designed to provide an exceptional "value for money" professional machine.

The ETB4045 has a number of cost saving variations introduced into the specification without loss of performance or operating life. The LoLine chassis is manufactured in nutex epoxy powder coated steel in place of stainless steel; the wet pick up floor tool is Structofoam rather than aluminium and the machine is fitted with fully sealed 60Ahr gel batteries.

- On Board Charging Convenient and easy, just plug and go.
- Fully Sealed Gel Batteries Maintenance-free batteries to ensure the highest standard of operational life.
- Structofoam Tilting Brush Making brush and pad changing quick

and easy.

Numerite

ETB4045 400W 400W 2x12V 2hrs 6hrs 400/450mm 40L 103kg 100rpm 470x1030x1160mm

- Polyform Tanks Tough Polyform clean and dirty water tanks.
- Twinflo Vacuum Motor Provides exceptional wet pick up.
- Flexifill System Easy filling and emptying with Flexifill system.



TwinTec Battery Setting the Standard

With these machines every part is designed to combine the best in functionality and reliability.



The TTB4045 is the classic Numatic TwinTec 24V battery model. It started its life with 30 litre capacity, now raised to 40 litre, and is today the most popular model worldwide. The premium specification starts with a full stainless steel chassis, Structofoam tilting brush deck, polyform tanks, fully sealed gel batteries, built in battery charger, heavy duty TwinFlo wet pick up vacuum system and heavy duty geared brush drive.

The 4055 is one size up from the 4045 containing all the advanced TwinTec 24V features but with a 20% increased cleaning path.

The 4055T (traction) offers effortless cleaning due to the powerful traction unit. A traction model is essential where inclines such as wheelchair ramps are present.

 Fully Sealed Gel Batteries Maintenance-free batteries to ensure the highest standard of operational life.

- Twinflo Vacuum Motor Provides exceptional wet pick up.
- Structofoam Tilting Brush Deck Making brush and pad changing quick and easy.
- Easy Operation Simple on / off trigger control.
- Stainless Steel Chassis Strong, long life, low maintenance.
- On Board Charging Convenient and easy, just plug and go.
- Hi / Lo Mode For quieter cleaning when required.



Soft touch Nutronic controls

Model	Brush Motor	Vac Motor	Power	Run Time	Recharge Time	Pad/Brush Width	Capacity	Weight	Traction Drive	Brush Speed	Dimensions WxLxH
TTB4045				2.25Hrs		400/450mm		128kg			470x1075x 1160mm
TTB4055	400W	400W	2x12V (24V 100Ah)	2.25HIS		500/550mm	40L	134kg	-	100rpm	560x1115
TTB4055T				2.3Hrs		500/550mm		140kg	250W		x1160mm

17





Battery isolator key

T= Traction drive 16 (See page 32 for full accessories

Twin Tec Battery Twin Brush Power and Performance

All the specification of other TwinTec models with the addition of a twin brush deep power cleaning system.

For more demanding high resistance floor surfaces the Twin Brush is often the preferred choice giving optimal performance in any situation.

There are two variations within this model, one with and one without the powered traction drive. The traction drive model must be selected for applications where inclines or wheelchair access ramps are part of the cleaning programme.

18 (See page 32 for full accessories)

...Twin Brush Power and Performance



- Traction Drive System
 Makes the cleaning of inclines safer and easier. TTB4552T only.
- Fully Sealed Gel Batteries

 Maintenance-free batteries to ensure the highest standard of operational life.
- On Board Charging
 Convenient and easy, just plug and go.
- Stainless Steel Chassis Strong, long life, low maintenance.
- Polyform Tanks

- Fully Adjustable Handle For the perfect working position.
- Hours Meter Monitors operational hours for service intervals.
- Unique Flip Deck Easy to change pads and brushes with the flip up deck feature.



Soft touch Nutronic controls







565x1145 x1160mm

TwinTec Battery 50% More Capacity for bigger areas

Easy-to-use controls combined with professional cleaning.

The 55cm (20") size of TwinTec is becoming more and more popular and, in support of this, we have introduced two new models with 60 litre capacity, a 50% increase over the 40 litre models and available in both traction and non-traction specifications.

Both models of TTB6055 have 60 litre capacity and a 55cm (20") single brush scrubbing path, dual brush pressure selection, built in battery charging, easy fill and easy emptying facilities, with added traction power drive for the 6055T model which would be essential if inclines or ramps are involved.



 Simple Operator Controls Soft touch Nutronic control panel.

 Traction Drive System
 Makes the cleaning of inclines safer and
 easier (TTB6055T).


 On Board Charging Convenient and easy, just plug and go.

 Full Cleaning Control Individual speed and water flow rate settings for full control.

 Flexifill System Easy filling and emptying with flexifill


• Fully Sealed Gel Batteries

Maintenance-free batteries to ensure the highest standard of operational life.



Security key


Battery life indicator

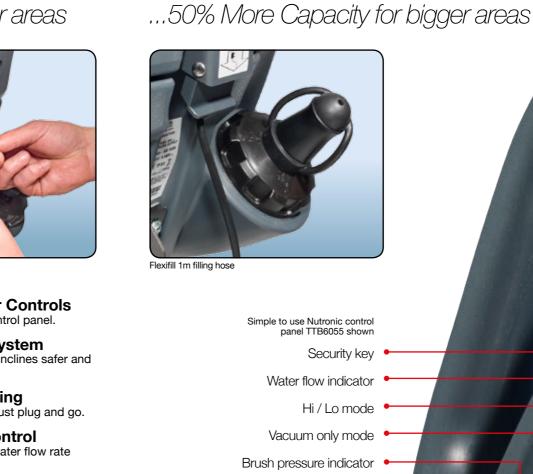







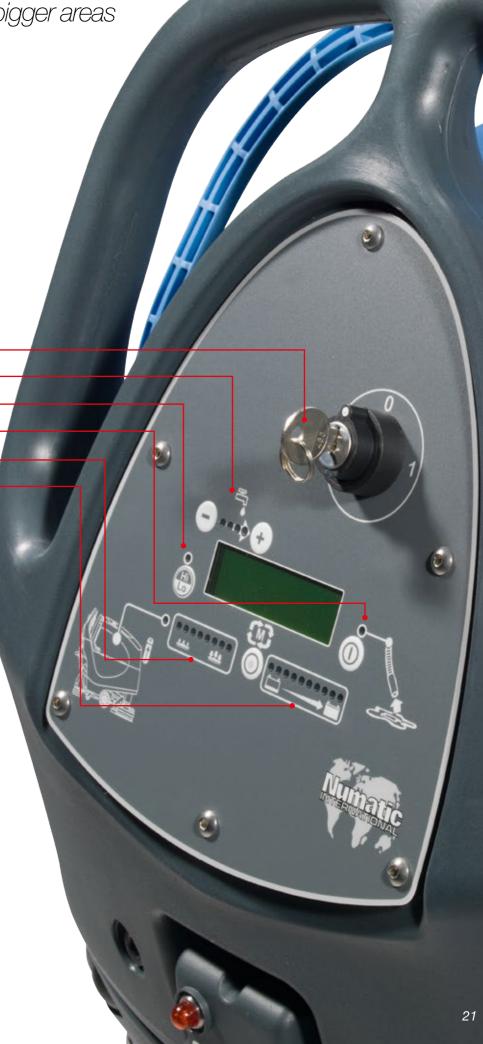

TwinTec Vario Two Into One Does Go

The TwinTec Vario 4555 provides a smaller machine yet with all the advanced and time tested features of the bigger walk behind model.



The TwinTec Vario 4555 has taken the very best technology from other models in the Vario range and integrated these features into one of the most compact, hard working, professional floor maintenance machines with a choice of either 45cm or 55cm scrubbing widths by virtue of the adjustable dual setting Vario deck design.

What has been achieved, both in terms of performance and handling, is truly outstanding, resulting in a machine that will become the preferred choice of many contractors servicing medium size contracts where overall machine size is an important user consideration.





Rotating buffers





Maintenance-free batteries to ensure the highest standard of operational life.

• Simple Operator Control Nutronic soft touch operator controls.

Built in emergency stop button and removable power off

Model	Brush M	otor Power	Vac Mot	or Cleaning Speed	Pad/Brus Sizes	h	Net Weight	Run Time	Water Capacity	Nuchem Capacity
TTV4555	400V	2 x 12V =100Ahr	400W	0 - 4.2kph	400/500m 450/550m		158kg	2.25hrs	60L	5L
Water Flo	w Rate	Nuchem	Mix	Max Climbing Gradient	Scrub Widths	Bru	sh Speed	Dim	ensions (WxL)	(H)
0.5, 1, 2, 3	3 L/min	100:1 75:1 50	0:1 25:1	9%	450/550mm	1	00rpm	550x	1280x1160ı	nm

With a full 60 litre capacity, built in dosing and dual brush pressure, true versatility is the principal objective, not to mention built in battery charging, easy fill and emptying systems adding to the high level of user convenience and satisfaction.

TwinTec Vano Two Into One Goes Again, Even Bigger

The TwinTec Vario 5565 represents, in every way, the optimum walk behind traction auto-scrubber with a range of advanced, yet practical, features that truly allow us to claim... "Best in Class".

This TwinTec gets its Vario name from the fact that this one machine can, by a no tools adjustment and simple brush change, be set to operate at either a 55cm or 65cm scrubbing width... two machine choices in one.



In the 65cm mode the scrubbing head is automatically expanded to a practical offset operating mode, providing a 100mm head extension to the right hand side. This simple arrangement allows improved edge cleaning especially in aisles with racking or other obstructions.

The operator controls are a separate feature in their own right with independent selection of speed, water flow and chemical dosing all built in to the basic unit, all of which can be set to provide total convenience and consistency of operation.

Simple to use Nutronic control pan

....Two Into One Goes Again, Even Bigge

- Flexifill System
 Easy filling and emptying with the flexifill system.
- Complete Cleaning Control Simple one touch dosing control and versatile variable speed control.
- Adjustable Scrub Widths
 55cm or 65cm scrubbing width by virtue
 of the adjustable dual setting Vario deck
 design.
- Spot Cleaning

 Heavy duty spot cleaning means
 operator can over-ride standard brush
 pressure to 50kg for extra performance.
- Easy Transportation

 Built in easy transit mode for easy transportation between areas.

- On Board Charging
 Convenient and easy, just plug
 and go. Fully sealed low
 maintenance gel batteries.
- Simple Operator Control
 Nutronic soft touch operator
 controls.
- Safety Features
 Built in emergency stop button
 and removable power off key
 are just two of the many
 safety features.




Easy battery access

Beneath the hinged dirty water tank sits the operating heart of the Vario with its 200Ahr gel battery and charging system, high performance suction unit and NuChem dosing facility... all easily accessible.

The unique Twintec 55cm/65cm dual brush system...

A simple, no tool adjustment and brush change allows a selection of either 55cm or 65cm scrubbing widths.



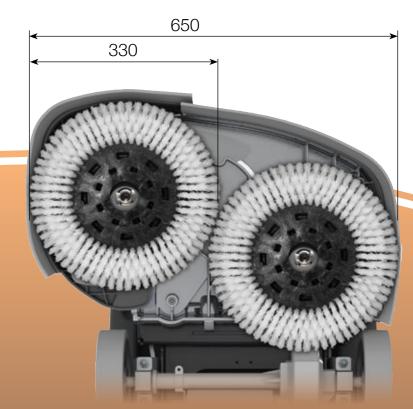

Model	Brush Motor Vac Motor		Power	Run Time	Traction Drive	Drive Speed	Cleaning Speed	Climbing Gradient	Scrub Widths
TTV5565	5 2x400W 600W		4 x 12V (24V) = 200Ahr	3.5 Hrs	480W	4.2km/h	4.2km/h	9%	550mm 650mm
Brush Speed	Water Capacity	Nuchem Capacity	Water Flow Rate	Nu	chem Mix		Weight	Dimensi	ions (WxLxH)

TTV5565

Compact Ride-On Compact "Go Anywhere"

Not too big, not too small, good capacity, simple controls, excellent performance and very competitive in terms of price.

In truth the CRO8055 is competitive with most walk behinds of the same size. So now you can sit rather than walk and by virtue of the exceptional manoeuvrability, substantial time will be saved on middle size applications.

The CRO8055 also introduces the logic of two machines in place of something much bigger or, to put it another way, Two for the Price of One with added versatility and convenience.

The CRO will go into places where bigger machines are not suitable and anything smaller is just too small.

Heavy duty integral chassis



...The Compact "Go Anywhere" Ride-on

Compact Design Means easy cleaning in tight spaces.

- Anti Tip System Prevents the machine from tipping when cornering on full lock.
- On Board Charging Easy and convenient, just plug and go. Fully sealed low maintenance Gel batteries.
- Flexifill System Easy filling and emptying with the flexifill system.
- Easy Operator Control With fully adjustable speed control.
- Safety Features Emergency stop button, removable power off key, horn button and built in hazard warning light are just a few of the safety features included.
- Easy Maintenance
 Easy access to batteries and fuses for maintenance.





Easy battery access



CRO8055

Model	Brush Diameter	Capacity	Battery Power	Run Time	Traction Drive	Clean Speed	Vacuum Motor	Brush Speed	Brush Motor	Dimensions (WxLxH)
CRO8055	550mm	80L	2 x 12V (24V) = 120 Ahr 2 x 12V (24V) = 100 Ahr	3h 2h	400W	6km/h max	400W	150rpm	1 x 600W	805x1460x1160mm

TwinTec Ride-On a Serious Workhorse

A more user friendly ride on scrubber dryer would be hard to find. Designed to provide long, simple and reliable service day in day out whatever the environment.

The TRO650 is based on the well established engineering of the Vario TTV678 model but simplified to provide a truly professional, cost effective workhorse. You can vary the water flow and the operating speed to suit a whole host of conditions from big areas lightly soiled to heavy duty scrubbing in more arduous conditions.



Model	Brush Motor	Vac Motor		Power		Run Time	Traction Drive	Drive Speed	Cleaning Speed
TRO650	2 x 400W	400W	4 x	12V (24V) = 200A	hr	3.5 Hrs	600W	0-7.0km/h	3.5km/h
Scrub Wid	th Brush Speed	Water Capa	city	Water Flow Rate	Cliu	mbing Gradie	nt Weight	Dimens	ions (WxLxH)
650	200rpm	120L		3, 2, 1, 0.5L/min		11%	365kgs	944x16	76x1425mm



The TRO650 is blessed with a commanding operator driving position, front wheel traction drive, a magnificent turning circle and one pass performance that really will ensure you get the standard you want, exactly when you want it... and fast.

... A Serious Two Brush Workhorse

Twin Brush 650 twin brush power head cleaning system.

- Easy Brush Access
 Easy side access to brushes for maintenance.
- Controlled Cleaning
 Fully adjustable water flow rate.
- On Board Charging
 Easy and convenient, just plug and go. Fully sealed low maintenance
 Gel batteries.
- Simple Operator Control
 Full dashboard control with soft touch
 Nutronic controls.
- Safety Features
 Emergency stop button, power off removable key, horn button and hazard warning light and built in reversing alarm are just a few of the many safety features included.
- Easy Maintenance
 Easy access to batteries and fuses for maintenance.



ull control dashboard



Drive wheel protect

A full 120 litre capacity with a fixed 650mm twin brush power head the TRO650 is ready to go.





TRO Aluminium / Polyurethane floor tool




TwinTec Vario Three Into One Does Go

A comfortable, driver friendly, 120-litre, front wheel drive machine with a fantastic turning radius, gets in and out of places other machines just won't go.

The TwinTec Vario "three in one" (3 in 1) design has proved itself to be almost the perfect balance between sound common sense engineering and innovative and truly functional technology.

Yes, one machine which can be set to 3 different working widths: 650, 750 and 850 and all at the flick of a simple selection lever. This doesn't even need tools - anybody can do it at any time. You want it wide -

you want it narrow - 30 seconds is all that it takes.



The unique arrangement of 3 independent scrubbing heads which, by virtue of a simple adjustment mechanism, can provide a choice of scrubbing widths which, with the addition of a selection of brushes and pads, can provide customised performance on almost any surface application.








As unique today as when it started - patented technology

- Vario 3 In 1 Brush System
 Simple adjustment mechanism provides
 a choice of scrubbing widths suitable for almost any surface.
- Easy Dosing Pre-sets
 Correct chemical dosing for every task.
- Complete Cleaning Control
 Operator has full control of cleaning
 speed, brush speed, water flow and chemical dosing.
- Simple Operator Control Soft touch dashboard control system.
- Easy Maintenance Easy access to batteries and fuses for service purposes and brush change is simple with the swing out brush cover.
- On Board Charger Simple and convenient, just plug and go. Fully sealed low maintenance Gel batteries.
- Small Turning Radius Means great cleaning even in
- Safety Features Emergency stop button, power off removable key, horn button and hazard warning light and built in reversing alarm are just a few of the many safety features included.
- Easy Maintenance Easy access to batteries and fuses for maintenance.





In many applications changing circumstances change specific needs, so with the Vario you can change the specification to suit your exact requirements. It's not only the working widths that can be changed; it's the full operating performance that is under the driver's complete control - cleaning speed, brush speed, water flow and chemical dosing, nothing left to chance.









Run Time	Traction Drive	Drive Speed	Cleaning Speed	Climbing Gradient
3.5 Hrs 4.5 Hrs	600W	7.0km/h	3.5km/h	11%

			(Ориона)	<u>, </u>			l		
Scrub Widths	Brush Speed	Water Capacity	Nuchem Capacity	Water Flow Rat	Nuchen e Mix	Gross \	Weight (full) Dimen	sions (WxLxH)
650mm 750mm 850mm	50/100/ 150/200rpm	120L	Optional 5L	4L/min 3L/min 2L/min 1L/min	50:1 75:1		/+620kgs /+684kgs		676x1425mm

Brushes and Pad Drive

Careful selection of quality brushes and pads will ensure your Floorcare machine always operates at its best.



General scrubbing duties suitable for most floor types.



Nyloscrub / Shampoo Brush Suitable for when lighter scrubbing is required. Can be used for shampoo cleaning.

6



Union Mix Polish Brush Ideal for polishing uses a well-proven mix of high quality bristles for optimum results.



Longlife / Scrubbing Brush Can provide extended cleaning life in comparison to standard scrubbing brushes. Suitable for general scrubbing.



Longlife Light Scrubbing Brush Nyloscrub Cylinder / Longlife Cylinder Brush Can provide extended cleaning life in comparison to alternative light scrubbing brushes. Suitable for light available in two material specifications. scrubbing and polishing.



Longlife Heavy Duty Scrubbing/Stripping Brush Can provide extended cleaning life in comparison to alternative heavy duty scrubbing brushes. Suitable for heavy duty scrubbing.




PadLoc Drive Board A simple, effective and easy to use system. Pads are located securely and perfectly centred every time. Suitable for general use.



Flexi PadLoc Drive Board For 300rpm Machines Flexi specification provides optimum stability needed for 300rpm speed machines.



High Speed Spider PadLoc Drive Board Spider design specification provides optimum stability needed for 450rpm speed machines.



NuLoc 2 Drive Board Alternative to PadLoc that may be required when using a rotary machine in certain circumstances. Suitable for general use.



High Speed Spider NuLoc 2 Drive Board Spider design specification provides optimum stability needed for 450rpm speed machines. NuLoc2 offers an alternative to PadLoc.



Flexi NuLoc 2 Drive Board Flexi specification provides optimum stability needed for 300rpm speed machines. NuLoc2 offers an alternative to PadLoc.



Porcupine Pad Holder Can be used as an alternative pad drive board when required.



Low water, chemical free maintenance suitable for a wide range of applications.



NuShine Topline Speed Burnish Pad Burnishing pad for use with Nushine HNS1550 (500mm). Supplied as pack of 5.

Specialised Brushes (Rotary machines only)



Suitable for scarifying a range of floor surfaces, typically used in preparation of concrete flooring.



Sandotex Disc Drive Highly abrasive disc for use on rotary machine.



Carbotex Grinding Disc Carbon based discs provide high abrasive properties with long life.



Heavy Duty Scarifying Disc - Spirotex 6 Head Heavy duty scarifying board fitted with 6 wire Spirotex heads.

		70		Rotar	v Flo	or Cl	eane	rs					Twin	Tec					/ario		
Type Image No.	Description	Brush / Pad Size mm	Part Number	HFM1015 HFM1515 /1523 NR1500S	HFM1530	HFM1545	HFT1530	HNS1550	NLL332	TT1535 S	TT/B1840	ET/B4045 TT/B4045	TT/B4055/T	TT6650	TTB4552/ 100S/T	TTB6055/ 100S/T	TTV4555		10	TRO650	TTV678
		280	606029												•x2					\dashv	
		330 400	606033 606105						•		•									\dashv	_
1	Polyscrub brush	450	606203	•			•					•					•x1				
		550	606028						П				٠			•	•x1		٠		
		650	606021											•							
		280	606552												•						
2	Nyloscrub brush	330 450	606556 606204	•			•		•			•					•		_	\dashv	_
	Nyloscrub brusi i	550	606550				Ľ						•			•	•		•	\dashv	
		650	606554											•							
		330	606104						•												
3	Union mix polish brush	400	606102						Ш		•										
		450	606202	•	•	•	•													_	
		280 400	606553 606302								•				•					\dashv	
4	Longlife brush	450	606302	•			•		Н		•						•				
4	Longille brush	550	606551										•			•	•		•	\dashv	
se		650	606555						П					•							П
Brushes		280	606173															•			
ă 1	Octo Polyscrub brush	300	606152																		•
		330	606174															•		•	
	Ooto Ni Japan ib bereit	280	606171															•			
2	Octo Nyloscrub brush	300	606151 606172						H									•		•x2	•x3
		280	606252															•x2		· XZ	
2	Octo high density Nyloscrub brush	330	606253						П									•x2		•	_
		280	606175															•			П
4	Octo longlife brush (green)	300	606153																		•
		330	606176						Ш									•		•	
_	0 1 1 25 1 1 / 1	280	606326						Ш									•		\dashv	
5	Octo longlife brush (red)	300	606327 606328															•		•	•
		400	606303																	Ť	
5	longlife light scrubbing brush (red)	450	606307	•			•		Н			•					•				
		550	901050										•			•				T	
6	1535 Nyloscrub cylinder brush		606225							•											
6	1535 Floortec cylinder brush	450	606226							•										4	_
7	Floortec scrubbing /stripping brush (black)	450	606305	•			•														_
		360	606400								•										
8	Dadlas divisa based (blast)	400	606401	•			•				İ	•					•				
l °	Padloc drive board (black)	500	606403										•			•	•		•		
۷		600	606404						Ш					•						4	
PadLoc	Dealle e este aldre besond	280	606405						Н									•			_
B B	Padloc octo drive board	330 300	606407 606406								-							•		•	•
9	Padloc flexi-drive board for 300 rpm	400	606411		•		•														Ť
10	Padloc spider-drive board for 450 rpm	400	606412			٠			П											\neg	
8	Twin PadLoc drive board	280	606409												•						
									_												_
		280	900713												•						
44	Nul ago diina bal	360	900524								•										
11	NuLoc2 drive board	400 500	900525 900526	•					H			•	•			•	•		•	\dashv	_
C 2		600	900320										Ť	•						\dashv	
NuLoc 2		280	900718						Н									•		\dashv	
Ž 11	Octo NuLoc 2 drive board	300	900719																		•
		330	900720															•		•	
12	High speed spider NuLoc 2 drive board (HFM/NR)	400	900527	•		٠														4	
13	Flexi NuLoc 2 drive board for 300rpm machines (HFM/NR)	400	900528		•		•														
당 17	Wire scarifying brush	400	606207	•																	
<u>:</u> 18	Sandotex disc drive	400	606209	•																\dashv	
iğ 19	Carbotex grinding disc	400	606208	•																	
S 20	Heavy duty scarifying disc. Spirotex 6-head	400	606211	•																	
V		350	900975																		
Nuplex 15	Nuplex Pads Pack of 5	430	900975	•	•	•	•					•					•			\dashv	
륄	Haplor Laud Laur Old	500	900974		É								•			•	•		•		
14 16	Porcupine pad holder	400	606700	•			•														
ö 16	Topline Speed Burnish Pad	500	901622					•													

Guidance only - Each application should be assessed before selection of brush / pad. Specification subject to change without prior notice.

Supplied with standard machine

Accessories

Using genuine Numatic accessories will ensure you achieve the best results from your Floorcare machine.

Each accessory is developed with professional cleaners in mind, good quality design makes all the difference when a task is repeated day after day.

Hurricane and NuSpeed Accessories



HFT / HFM Solution Tank PN:606890



NR 10Kg Weight For NR 1500S PN:606113 **HFM** 10Kg Weight For HFM 1500S PN:606077



NR Solution Tank PN:606084



HFM / NR Dustrol Control Brush Ring (Also Standard With Dustrol Kits) PN:606079



NR Optional Spraytec Kit PN:606054 HFM / HNS Optional Spraytec Kit PN:606325

TwinTec / Vario Blade Sets



ET4045 / ETB4045 Replacement Rubber Blade Set, 785mm Working Width. PN:606037



ET4045 / ETB4045 Optional Polyurethane Blade Upgrade

Kit 785mm Working Width. PN:606074



Blade Set (4 pieces) PN:606091

TT/TTB4045 / TT/TTB4055 / CRO8055 / TTV678 TTV4555 / TTV5565 / TTB6055 / TTB6650 / TRO650


Replacement Polyurethane Blade Set, TT4045 / TTB4045 / CRO8055 / TTV678 805mm PN:900518 TT4055 / TTB4055 / TTB6055 / TTV4555 944mm PN:900519 TTB6650 / TTV5565 / TTV678 / TRO650 1053mm PN:900520

TwinTec / Vario Floor Tools



ET4055 / ETB4055

Optional Large Structofoam Floor Tool, Rubber Blade, 845mm Working Width. PN:606310



Adjustable wheels & green polyurethane blades included TT4045 / TTB4045 / CR08055 / TTV678 PN:900521 TT4055 / TTB4055 / TTB6055 / TTV4555 PN:900522 TT6650 / TTV5565 / TTV678 / TR0650 PN:900523

TwinTec / Vario Accessories



All TT/TTB Machines Wander Floor Kit (32mm) (Except TT / TTB1840) PN:607250



All TTB Machines Wander Floor Kit (38mm), (Except TT / TTB1840) PN:606193



38mm Emptying Hose Extension PN:606186



Battery LED Front Light Kit PN:606170



Twintec / Vario Aluminium Floor Tool Wide Angle Adjustable Castor Plate Upgrade Kit. PN:606319



Twintec / Vario 38/32mm Hose Adaptor PN:237220



Generic 20m Cable Roll Extension UK PN:612002 20m Cable Roll Extension Euro PN:612003



Twintec / Vario Emptying Hose Extension Kit PN:609100



Twintec / Vario Floor Tool Detent Pin PN:206953

42mm Dosing Tank Cap PN:304456



TT/TTB4045 / TT/TTB4055 Floor Tool Bracket Assembly PN:304466



TTB6055 / TTV4555 / TTV5565



TRO650 / TTV678 Floor Tool Bracket Assembly. PN:303795



38mm Dosing Tank Cap PN:303827 TTV678 Dosing Tank PN:606169



TTV USB Preset Locking Key PN:606279



TTV4555 / TTV5565 Dosing Tank PN:606278



TTB1840 Battery & Charger Pack UK PN:606266, EUR PN:606267, CH PN:606268, USA PN:606269, SA PN:606270, AUS PN:606271

TTB1840 Charger Pack
UK PN:606272, EUR PN:606273,
CH PN:606274, USA PN:606275,
SA PN:606276, AUS PN:606277
(Boxed) PN:606260



Numatic International Limited,

Chard, Somerset, TA20 2GB, UNITED KINGDOM

Tel: 01460 68600 Fax: 01460 68458 www.numatic.co.uk



Numatic International S.A.S,

13/17 rue du Valengelier, EAE la Tuilerie, 77500 Chelles, FRANCE

Tel: 01 64 72 61 61 Fax: 01 64 72 61 62

www.numatic.fr



Numatic International BV

BeNeLux Distribution Numatic International BV Postbus 101 2400 AC Alphen aan den Rijn NEDERLAND

Tel: 0172 467 999 Fax: 0172 467 970

www.numatic.nl



Numatic International GMBH

Fränkische Straße 15-19, 30455 Hannover DEUTSCHLAND

Tel: 05 11 98 42 16 0 Fax: 05 11 98 42 16 20

www.numatic.de



Numatic International Schweiz AG.

Sihlbruggstraße 142 6340 Baar, SCHWEIZ

Tel: 041 768 07 60 Fax: 041 768 07 69 www.numatic.ch



Numatic International ULDA

Centro de Negócios da Maia Rua Albino José Domingues n.º 581 4470 - 034 Maia PORTUGAL

Tel: 351 220 047 700 www.numatic.pt



Numatic International (Pty.) Ltd.

16th & Pharmaceutical Roads, Midrand, Gauteng, S.A. 1685.

Tel: 0861 686 284 Fax: 0861 686 329 www.numatic.co.za

